

# Poleas Dentadas "Top Drive® -HTD"


NORMAS: ISO5294-DIN7721



## 5M

## POLEA CIEGA

### FIGURASYDIMENSIONES

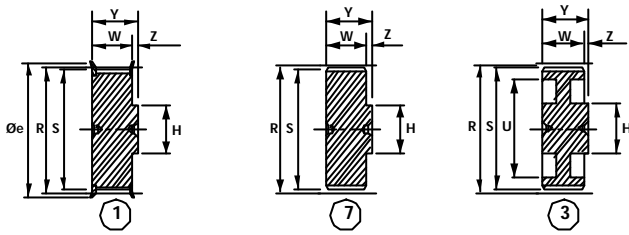

#### MATERIAL

de 12 a 40 dientes	de 44 a 72 dientes
Acero	Aluminio

Referencia	Válculo	Nº dientes	R Ø(mm)	S Ø(mm)	U Ø(mm)	e Ø(mm)	d Ø(mm)	5M09 W=14,5(mm)				5M15 W=20,5(mm)				5M25 W=30(mm)			
								Figura	H Ø(mm)	Y (mm)	Z (mm)	Figura	H Ø(mm)	Y (mm)	Z (mm)	Figura	H Ø(mm)	Y (mm)	Z (mm)
12-5M	F	12	19,10	17,96	-	23	1	13,0	20,0	5,5	1	13,0	26,0	5,5	1	13,0	36,0	6,0	
14-5M	F	14	22,28	21,14	-	24	1	14,0	20,0	5,5	1	14,0	26,0	5,5	1	14,0	36,0	6,0	
15-5M	F	15	23,87	22,73	-	27	1	16,0	20,0	5,5	1	16,0	26,0	5,5	1	16,0	36,0	6,0	
16-5M	F	16	25,46	24,32	-	27	1	16,5	20,0	5,5	1	16,5	26,0	5,5	1	16,5	36,0	6,0	
18-5M	F	18	28,65	27,51	-	30	1	20,0	20,0	5,5	1	20,0	26,0	5,5	1	20,0	36,0	6,0	
20-5M	F	20	31,83	30,69	-	33	1	23,0	22,5	8,0	1	23,0	26,0	5,5	1	23,0	36,0	6,0	
21-5M	F	21	33,42	32,28	-	36	1	24,0	22,5	8,0	1	24,0	26,0	5,5	1	24,0	38,0	8,0	
22-5M	F	22	35,01	33,87	-	36	1	25,0	22,5	8,0	1	25,5	26,0	5,5	1	25,5	38,0	8,0	
24-5M	F	24	38,20	37,06	-	40	1	27,0	22,5	8,0	1	27,0	28,0	7,5	1	27,0	38,0	8,0	
26-5M	F	26	41,38	40,24	-	46	1	30,0	22,5	8,0	1	30,0	28,0	7,5	1	30,0	38,0	8,0	
28-5M	F	28	44,56	43,42	-	50	1	30,5	22,5	8,0	1	30,5	28,0	7,5	1	30,5	38,0	8,0	
30-5M	F	30	47,75	46,61	-	50	1	35,0	22,5	8,0	1	35,0	28,0	7,5	1	35,0	38,0	8,0	
32-5M	F	32	50,93	49,79	-	55	1	38,0	22,5	8,0	1	38,0	28,0	7,5	1	38,0	38,0	8,0	
36-5M	F	36	57,30	56,16	-	62	1	38,0	22,5	8,0	1	38,0	28,0	7,5	1	38,0	38,0	8,0	
40-5M	F	40	63,66	62,52	-	67	1	38,0	22,5	8,0	1	38,0	28,0	7,5	1	38,0	38,0	8,0	
44-5M		44	70,03	68,89	-	-	7	38,0	25,0	10,5	7	38,0	30,0	9,5	7	38,0	40,0	10,0	
48-5M		48	76,39	75,25	-	-	7	45,0	25,0	10,5	7	38,0	30,0	9,5	7	38,0	40,0	10,0	
60-5M		60	95,49	94,35	-	-	7	45,0	25,0	10,5	7	50,0	30,0	9,5	7	50,0	40,0	10,0	
72-5M		72	114,59	113,45	90	-	5	45,0	25,0	10,5	5	50,0	30,0	9,5	5	50,0	40,0	10,0	