

Poleas Dentadas "Top Drive®-HTD"


NORMAS: ISO5294-DIN7721



5M

POLEA PARA TAPER-LOCK

FIGURASYDIMENSIONES

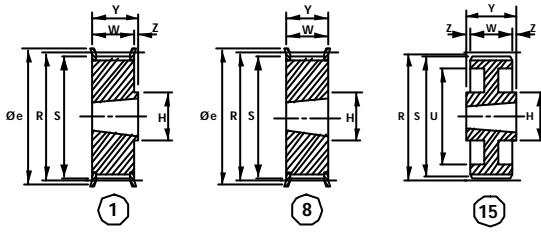

MATERIAL	
de 34 a 48 dientes	de 56 a 150 dientes
Acero	Fundición

Referencia	Vale más	Nº dientes	R Ø(mm)	S Ø(mm)	e Ø(mm)	U Ø(mm)	5M15					Ref. Taper
							Figura	W (mm)	H Ø(mm)	Y (mm)	Z (mm)	
34 -5M	F	34	54,11	52,97	57	-	8	22	-	22	-	1008
36 -5M	F	36	57,29	56,16	62	-	8	22	-	22	-	1108
38 -5M	F	38	60,48	59,34	67	-	8	22	-	22	-	1108
40 -5M	F	40	63,66	62,52	73	-	8	22	-	22	-	1108
44 -5M	F	44	70,03	68,89	73	-	8	22	-	22	-	1108
48 -5M	F	48	76,39	75,25	84	-	1	20,5	64	25	4,5	1210
56 -5M	F	56	89,12	87,99	94	-	1	20,5	70	25	4,5	1210
64 -5M	F	64	101,86	100,72	108	-	1	20,5	78	25	4,5	1210
72 -5M	F	72	114,59	113,45	121	-	1	20,5	90	25	4,5	1610
80 -5M	F	80	127,32	126,18	131	-	1	20,5	92	25	4,5	1610
90 -5M		90	143,24	142,10	-	122	15	20,5	92	25	4,5	1610
112 -5M		112	178,25	177,11	-	157	15	20,5	92	25	4,5	1610
136 -5M		136	216,44	215,31	-	195	15	20,5	110	32	5,8	2012
150 -5M		150	238,73	237,59	-	217	15	20,5	110	32	5,8	2012