

# Poleas Dentadas "Super Torque-STPD"


NORMAS: ISO5294-DIN7721



## S14M

POLEA CIEGA

### FIGURASYDIMENSIONES

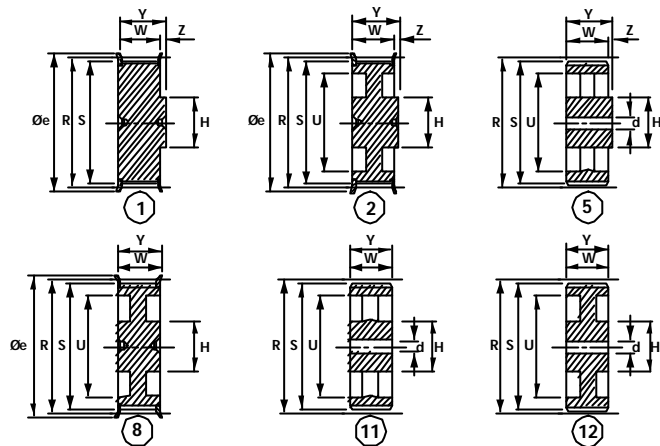

MATERIAL

de 28 a 144  
dientes

Fundición

Referencia	Vallo mas	Nº de dientes	R Ø (mm)	S Ø (mm)	e Ø (mm)	d Ø (mm)	S14M40 W=54(mm)				S14M55 W=70(mm)				S14M85 W=102(mm)						
							Figura	U Ø (mm)	H Ø (mm)	Y (mm)	Z (mm)	Figura	U Ø (mm)	H Ø (mm)	Y (mm)	Z (mm)	Figura	U Ø (mm)	H Ø (mm)	Y (mm)	Z (mm)
28-S14M	F	28	124,78	121,98	134	-	1	-	100	69	15	1	-	100	85	15	1	-	100	117	15
29-S14M	F	29	129,23	126,44	134	-	1	-	107	69	15	1	-	107	85	15	1	-	107	117	15
30-S14M	F	30	133,69	130,90	142	-	1	-	107	69	15	1	-	107	85	15	1	-	107	117	15
32-S14M	F	32	142,60	139,81	150	-	1	-	114	69	15	1	-	114	85	15	1	-	114	117	15
34-S14M	F	34	151,52	148,72	158	-	1	-	122	69	15	1	-	122	85	15	1	-	122	117	15
36-S14M	F	36	160,43	157,63	166	-	1	-	128	69	15	1	-	128	85	15	1	-	128	117	15
38-S14M	F	38	169,34	166,55	177	-	1	-	141	69	15	1	-	141	85	15	1	-	141	117	15
40-S14M	F	40	178,25	175,46	186	-	1	-	148	69	15	1	-	148	85	15	1	-	148	117	15
44-S14M	F	44	196,08	193,28	209	-	2	154	120	69	15	2	154	120	85	15	1	-	169	117	15
48-S14M	F	48	213,90	211,11	216	-	2	172	135	69	15	8	172	135	70	-	1	-	186	117	15
56-S14M	F	56	249,55	246,76	261	-	2	207	135	69	15	8	207	135	70	-	8	207	150	102	-
60-S14M	F	60	267,38	264,59	274	-	2	225	135	69	15	8	225	135	70	-	8	225	150	102	-
64-S14M	F	64	285,21	282,41	288	-	2	243	135	69	15	8	243	135	70	-	8	243	150	102	-
72-S14M		72	320,86	318,06	-	19	5	279	135	69	15	11	279	135	70	-	11	279	150	102	-
80-S14M		80	356,51	353,71	-	19	5	314	135	69	15	11	314	135	70	-	11	314	150	102	-
84-S14M		84	374,33	371,54	-	19	5	332	135	69	15	11	332	135	70	-	11	332	150	102	-
90-S14M		90	401,07	398,28	-	19	5	359	135	69	15	11	359	135	70	-	11	359	150	102	-
112-S14M		112	499,11	496,32	-	19	5	457	135	69	15	11	457	135	70	-	11	457	150	102	-
144-S14M		144	641,71	638,92	-	19	5	600	135	69	15	11	600	135	70	-	11	600	150	102	-

Referencia	Vallo mas	Nº de dientes	R Ø (mm)	S Ø (mm)	e Ø (mm)	d Ø (mm)	S14M115 W=133(mm)				S14M170 W=187(mm)					
							Figura	U Ø (mm)	H Ø (mm)	Y (mm)	Z (mm)	Figura	U Ø (mm)	H Ø (mm)	Y (mm)	Z (mm)
28-S14M	F	28	124,78	121,98	134	-	1	-	100	148	15	1	-	100	202	15
29-S14M	F	29	129,23	126,44	134	-	1	-	107	148	15	1	-	107	202	15
30-S14M	F	30	133,69	130,90	142	-	1	-	107	148	15	1	-	107	202	15
32-S14M	F	32	142,60	139,81	150	-	1	-	114	148	15	1	-	114	202	15
34-S14M	F	34	151,52	148,72	158	-	1	-	122	148	15	1	-	122	202	15
36-S14M	F	36	160,43	157,63	166	-	1	-	128	148	15	1	-	128	202	15
38-S14M	F	38	169,34	166,55	177	-	1	-	141	148	15	1	-	141	202	15
40-S14M	F	40	178,25	175,46	186	-	1	-	148	148	15	1	-	148	202	15
44-S14M	F	44	196,08	193,28	209	-	1	-	169	148	15	1	-	169	202	15
48-S14M	F	48	213,90	211,11	216	-	1	-	186	148	15	1	-	186	202	15
56-S14M	F	56	249,55	246,76	261	-	2	207	150	133	-	2	207	160	202	15
60-S14M	F	60	267,38	264,59	274	-	8	225	150	133	-	2	225	160	202	15
64-S14M	F	64	285,21	282,41	288	-	8	243	150	133	-	2	243	180	202	15
72-S14M		72	320,86	318,06	-	19	11	279	150	133	-	12	279	180	187	-
80-S14M		80	356,51	353,71	-	19	11	314	150	133	-	12	314	180	187	-
84-S14M		84	374,33	371,54	-	19	11	332	150	133	-	11	332	180	187	-
90-S14M		90	401,07	398,28	-	19	11	359	150	133	-	11	359	180	187	-
112-S14M		112	499,11	496,32	-	19	11	457	150	133	-	11	457	200	187	-
144-S14M		144	641,71	638,92	-	19	11	600	150	133	-	11	600	220	187	-

