

# Poleas Dentadas "Super Torque-STPD"


NORMAS: ISO5294-DIN7721



## S14M

POLEA PARA TAPER-LOCK

### FIGURASYDIMENSIONES

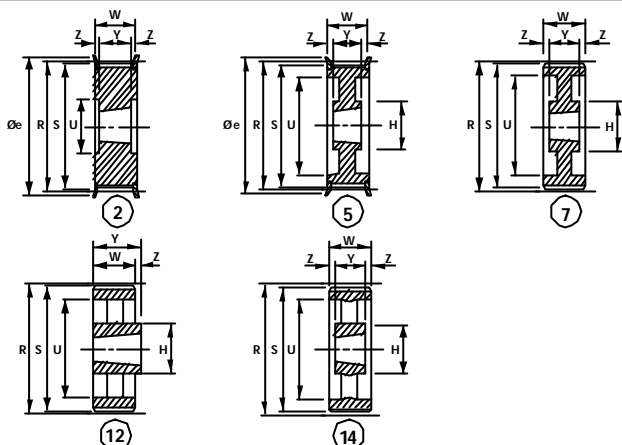

MATERIAL

de 28 a 264  
dientes

Fundición

Referencia	Vallo mas	Nº de dientes	R Ø (mm)	S Ø (mm)	e Ø (mm)	U Ø (mm)	S14M40 W=54(mm)				S14M55 W=70(mm)				S14M85 W=102(mm)						
							Figura	H Ø (mm)	Y (mm)	Z (mm)	Ref. Taper	Figura	H Ø (mm)	Y (mm)	Z (mm)	Ref. Taper	Figura	H Ø (mm)	Y (mm)	Z (mm)	Ref. Taper
28-S14M	F	28	124,78	121,98	134	98	2	-	32	11	2012	2	-	32	19	2012	2	-	45	28,5	2517
29-S14M	F	29	129,23	126,44	134	100	2	-	32	11	2012	2	-	32	19	2012	2	-	45	28,5	2517
30-S14M	F	30	133,69	130,90	142	100	2	-	32	11	2012	2	-	45	12,5	2517	2	-	45	28,5	2517
32-S14M	F	32	142,60	139,81	150	104	2	-	32	11	2012	2	-	45	12,5	2517	2	-	45	28,5	2517
34-S14M	F	34	151,52	148,72	158	110	2	-	45	4,5	2517	2	-	45	12,5	2517	2	-	45	28,5	2517
36-S14M	F	36	160,43	157,63	166	120	2	-	45	4,5	2517	2	-	45	12,5	2517	2	-	51	25,5	3020
38-S14M	F	38	169,34	166,55	177	130	2	-	45	4,5	2517	2	-	45	12,5	2517	2	-	51	25,5	3020
40-S14M	F	40	178,25	175,46	186	138	2	-	45	4,5	2517	2	-	45	12,5	2517	2	-	51	25,5	3020
44-S14M	F	44	196,08	193,28	209	154	2	-	51	1,5	3020	2	-	51	9,5	3020	2	-	76	13	3030
48-S14M	F	48	213,90	211,11	216	172	2	-	51	1,5	3020	2	-	51	9,5	3020	2	-	76	13	3030
56-S14M	F	56	249,55	246,76	261	207	5	146	51	1,5	3020	5	146	51	9,5	3020	2	-	89	6,5	3535
64-S14M	F	64	285,21	282,41	288	243	5	146	51	1,5	3020	5	146	51	9,5	3020	5	178	89	6,5	3535
72-S14M	F	72	320,86	318,06	-	279	7	146	51	1,5	3020	7	146	51	9,5	3020	7	178	89	6,5	3535
80-S14M	F	80	356,51	353,71	-	314	14	146	51	1,5	3020	14	146	51	9,5	3020	14	178	89	6,5	3535
90-S14M	F	90	401,07	398,28	-	359	14	146	51	1,5	3020	14	146	51	9,5	3020	14	178	89	6,5	3535
112-S14M	F	112	499,11	496,32	-	457	14	146	51	1,5	3020	14	146	51	9,5	3020	14	178	89	6,5	3535
144-S14M	F	144	641,71	638,92	-	600	14	146	51	1,5	3020	14	146	51	9,5	3020	14	178	89	6,5	3535

Referencia	Vallo mas	Nº de dientes	R Ø (mm)	S Ø (mm)	e Ø (mm)	U Ø (mm)	S14M115 W=133(mm)				S14M170 W=187(mm)										
							Figura	H Ø (mm)	Y (mm)	Z (mm)	Ref. Taper	Figura	H Ø (mm)	Y (mm)	Z (mm)	Ref. Taper					
28-S14M	F	28	124,78	121,98	134	98	2	-	45	44	2517										
29-S14M	F	29	129,23	126,44	134	100	2	-	45	44	2517										
30-S14M	F	30	133,69	130,90	142	100	2	-	45	44	2517										
32-S14M	F	32	142,60	139,81	150	104	2	-	45	44	2517										
34-S14M	F	34	151,52	148,72	158	110	2	-	45	44	2517										
36-S14M	F	36	160,43	157,63	166	120	2	-	51	41	3020										
38-S14M	F	38	169,34	166,55	177	130	2	-	51	41	3020	2	-	76	55,5	3030					
40-S14M	F	40	178,25	175,46	186	138	2	-	51	41	3020	2	-	76	55,5	3030					
44-S14M	F	44	196,08	193,28	209	154	2	-	76	28,5	3030	2	-	89	49	3535					
48-S14M	F	48	213,90	211,11	216	172	2	-	76	28,5	3030	2	-	89	49	3535					
56-S14M	F	56	249,55	246,76	261	207	2	-	89	22	3535	2	-	89	49	3535					
64-S14M	F	64	285,21	282,41	288	243	5	178	89	22	3535	2	-	102	42,5	4040					
72-S14M	F	72	320,86	318,06	-	279	7	178	89	22	3535	2	215	102	42,5	4040					
80-S14M	F	80	356,51	353,71	-	314	14	178	89	22	3535	7	215	102	42,5	4040					
90-S14M	F	90	401,07	398,28	-	359	14	178	89	22	3535	14	215	102	42,5	4040					
112-S14M	F	112	499,11	496,32	-	457	14	178	89	22	3535	14	267	127	30	5050					
144-S14M	F	144	641,71	638,92	-	600	14	215	102	15,5	4040	14	267	127	30	5050					