

Poleas Dentadas "Super Torque-STPD"


NORMAS: ISO5294-DIN7721



S8M

POLEA PARA TAPER-LOCK

FIGURASYDIMENSIONES

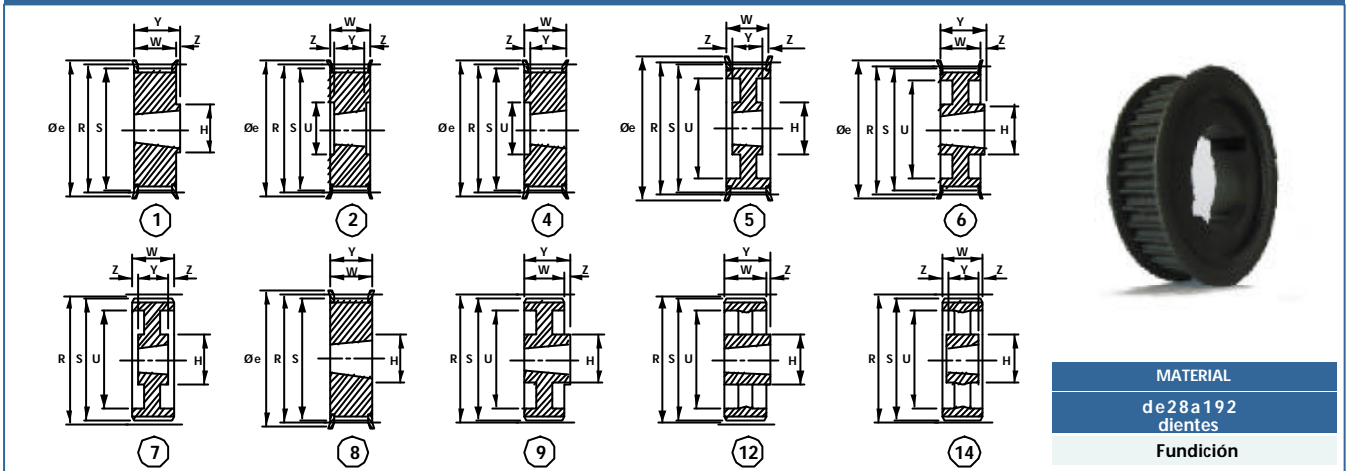

Referencia	Valores	R Ø(mm)	S Ø(mm)	e Ø(mm)	S8M20 W=28(mm)					S8M30 W=38(mm)					S8M50 W=60(mm)					S8M85 W=95(mm)								
					Figura	U Ø (mm)	H Ø (mm)	Y Ø (mm)	Z Ø (mm)	Taper	Figura	U Ø (mm)	H Ø (mm)	Y Ø (mm)	Z Ø (mm)	Taper	Figura	U Ø (mm)	H Ø (mm)	Y Ø (mm)	Z Ø (mm)	Taper	Figura	U Ø (mm)	H Ø (mm)	Y Ø (mm)	Z Ø (mm)	Taper
22-S8M	F	56,02	54,65	62	4	38	-	22	6	1008	4	38	-	22	16	1008												
24-S8M	F	61,12	59,74	67	4	42	-	22	6	1108	4	42	-	22	16	1108												
26-S8M	F	66,21	64,84	73	4	45	-	22	6	1108	4	45	-	22	16	1108												
28-S8M	F	71,30	69,93	77	4	52	-	22	6	1108	4	52	-	22	16	1108	2	52	-	22	19	1108						
30-S8M	F	76,39	75,02	84	4	56	-	22	6	1108	8	-	-	38	-	1615	4	58	-	38	22	1615						
32-S8M	F	81,49	80,12	88	4	65	-	25	3	1610	8	-	-	38	-	1615	4	60	-	38	22	1615						
34-S8M	F	86,58	85,21	94	4	66	-	25	3	1610	8	-	-	38	-	1615	4	66	-	38	22	1615	2	66	-	38	28,5	1615
36-S8M	F	91,67	90,30	98	4	68	-	25	3	1610	8	-	-	38	-	1615	4	68	-	38	22	1615	2	68	-	38	28,5	1615
38-S8M	F	96,77	95,39	104	4	76	-	25	3	1610	8	-	-	38	-	1615	4	75	-	38	22	1615	2	75	-	38	28,5	1615
40-S8M	F	101,86	100,49	108	4	80	-	25	3	1610	8	-	-	38	-	1615	2	80	-	32	14	2012	2	80	-	32	31,5	2012
44-S8M	F	112,05	110,67	121	1	-	99	32	4	2012	2	90	-	32	3	2012	2	90	-	32	14	2012	2	90	-	32	31,5	2012
48-S8M	F	122,23	120,86	129	1	-	105	32	4	2012	2	98	-	32	3	2012	2	100	-	32	14	2012	2	100	-	45	25	2517
56-S8M	F	142,60	141,23	149	1	-	105	32	4	2012	2	118	-	32	3	2012	2	120	-	45	7,5	2517	2	120	-	45	25	2517
64-S8M	F	162,97	161,60	168	6	140	110	32	4	2012	6	140	115	45	7	2517	5	138	115	45	7,5	2517	2	138	-	45	25	2517
72-S8M	F	183,35	181,97	191	6	158	110	32	4	2012	6	158	120	45	7	2517	5	158	120	45	7,5	2517	2	158	-	51	22	3020
80-S8M		203,72	202,35	-	9	178	110	32	4	2012	9	178	120	45	7	2517	7	178	140	51	4,5	3020	7	178	140	51	22	3020
90-S8M		229,18	227,81	-	12	204	110	32	4	2012	12	204	120	45	7	2517	7	204	146	51	4,5	3020	7	204	146	51	22	3020
112-S8M		285,21	283,83	-							12	260	120	45	7	2517	14	260	146	51	4,5	3020	14	260	146	51	22	3020
144-S8M		366,69	365,32	-							12	341	120	45	7	2517	14	341	146	51	4,5	3020	14	341	140	76	9,5	3030
168-S8M		427,81	426,42	-													14	402	146	51	4,5	3020	14	402	140	76	9,5	3030
192-S8M		488,92	487,54	-													14	462	146	51	4,5	3020	14	462	140	76	9,5	3030