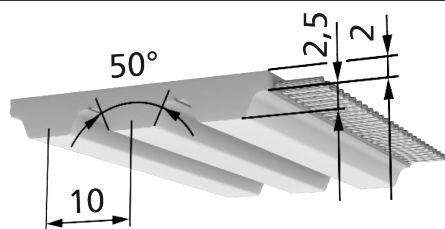
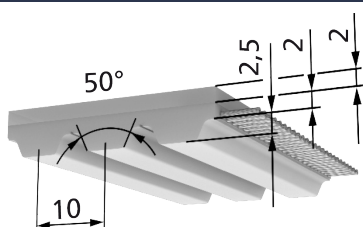


Standard



AT10

Version T



AT10-T

Available length and versions	AT10	Comment
Standard lengths	rolls of 50 or 100 m	-
Cut to lengths / lengths > 100 m	on request	-
In-between belt widths / other widths	on request	-
minimum length endless joined (b ≤ 100 mm)	880 mm	-
minimum length endless joined (b > 100 mm)	1,000 mm	-
Standard material	TPUST1	further materials on request
Steel tension member	Standard	-
E tension member	available	Minimum purchase amount on request
Stainless steel cord	available	Minimum purchase amount on request
PAZ	available	-
PAR	available	-
PAZ-PAR	available	-
DL / DL-PAZ	not available	-
DR / DR-PAZ	not available	-
T / T-PAZ	available	b _{max} = 100 mm; minimum purchase amount on request



Belt widths b [mm] (In-between belt widths on request)

25	32	50	75	100	150
----	----	----	----	-----	-----

Tooth shear strength (specific belt tooth load bearing)

R.p.m. n [min ⁻¹]	F _{tspez} [N/cm]	R.p.m. n [min ⁻¹]	F _{tspez} [N/cm]	R.p.m. n [min ⁻¹]	F _{tspez} [N/cm]	R.p.m. n [min ⁻¹]	F _{tspez} [N/cm]
0	87.5	800	62.148	2,000	48.006	5,000	32.079
20	86.216	900	60.475	2,200	46.413	5,500	30.362
40	85.013	1,000	58.937	2,400	44.943	6,000	28.787
60	83.881	1,100	57.514	2,600	43.578	6,500	27.333
80	82.814	1,200	56.19	2,800	42.305	7,000	25.982
100	81.803	1,300	54.953	3,000	41.112	7,500	24.721
200	77.426	1,400	53.791	3,200	39.989	8,000	23.538
300	73.87	1,500	52.696	3,400	38.929	8,500	22.425
400	70.877	1,600	51.661	3,600	37.925	9,000	21.374
500	68.291	1,700	50.679	3,800	36.972	9,500	20.377
600	66.016	1,800	49.746	4,000	36.064	10,000	19.43
700	63.984	1,900	48.856	4,500	33.967		

AT10			Admissible tensile force of the belt F_{adm} / belt weight					
belt width		b [mm]	25	32	50	75	100	150
M	E / Steel tension member	F_{Tadm} [N]	4,250	5,500	8,500	12,750	17,000	22,000
	Specific elasticity (E- / Steel tension member)	C_{spez} [N]	$1.06 \cdot 10^6$	$1.37 \cdot 10^6$	$2.12 \cdot 10^6$	$3.18 \cdot 10^6$	$4.25 \cdot 10^6$	$5.5 \cdot 10^6$
	Stainless steel tension member	F_{Tadm} [N] / F_{Tzul} [N]	3,190	4,125	6,375	9,560	12,750	19,125
	Specific elasticity (stainless steel tens. m.)	C_{spez} [N]	$1.06 \cdot 10^6$	$1.37 \cdot 10^6$	$2.12 \cdot 10^6$	$3.18 \cdot 10^6$	$4.25 \cdot 10^6$	$5.5 \cdot 10^6$
V	E / Steel tension member	F_{Tadm} [N]	2,125	2,750	4,250	6,375	8,500	11,000
	Stainless steel tension member	T_{adm} [N]	1,595	2,065	3,190	4,780	6,375	9,565
Belt weight (Standard)		[kg/m]	0.158	0.186	0.29	0.436	0.581	0.839
Belt weight (DL)		[kg/m]	-	-	-	-	-	-
Belt weight (DR)		[kg/m]	-	-	-	-	-	-
Belt weight (T)		[kg/m]	0.205	0.263	0.41	0.616	0.821	-

AT10		Flexibility (Minimum number of teeth / minimum diameter)											
		Steel tension member				E / Steel tension member				Stainless steel tension member			
		Standard	DL	DR	T	Standard	DL	DR	T	Standard	DL	DR	T
	Minimum number of teeth without contraflexure (z_{min})	15	-	-	25	12	-	-	25	25	-	-	25
	Minimum diameter of tensioning roller without contraflexure (d_{min} [mm])	50	-	-	80	50	-	-	80	80	-	-	80
	Minimum number of teeth with contraflexure (z_{min})	25	-	-	25	20	-	-	25	40	-	-	40
	Minimum diameter of tensioning roller with contraflexure (d_{min} [mm])	120	-	-	120	80	-	-	120	130	-	-	130