



End attachments

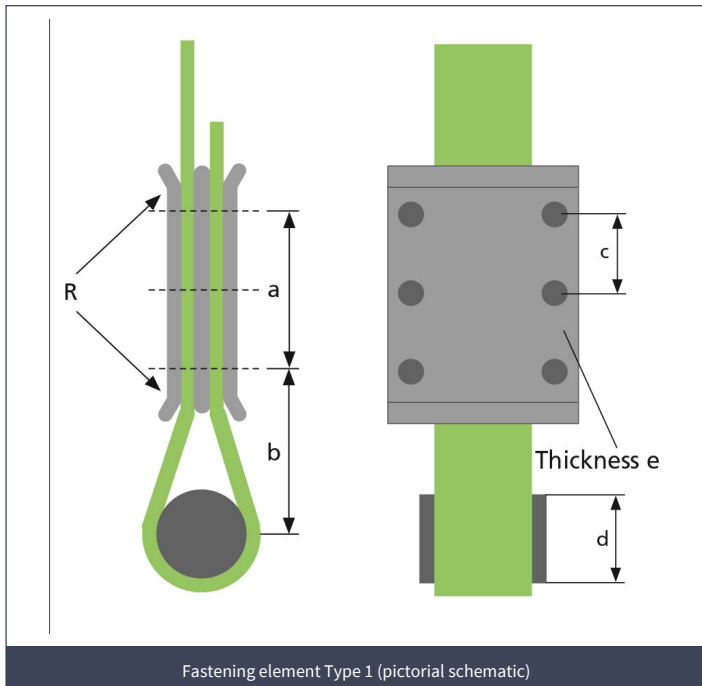

Typ 1	Technical				
	F1	F2	F2.2	F2.5	F3
a_{\min} [mm]	40	50	60	80	125
b_{\min} [mm]	25	30	45	50	75
c [mm] approx.	20	25	20	20	25
$\varnothing d_{\min}$ [mm]	16	25	30	30	50
e_{\min} [mm]	3	3	4	5	5
Radius R_{\min}	10	12	15	15	25
Thread (min)	M5	M6	M6	M6	M8

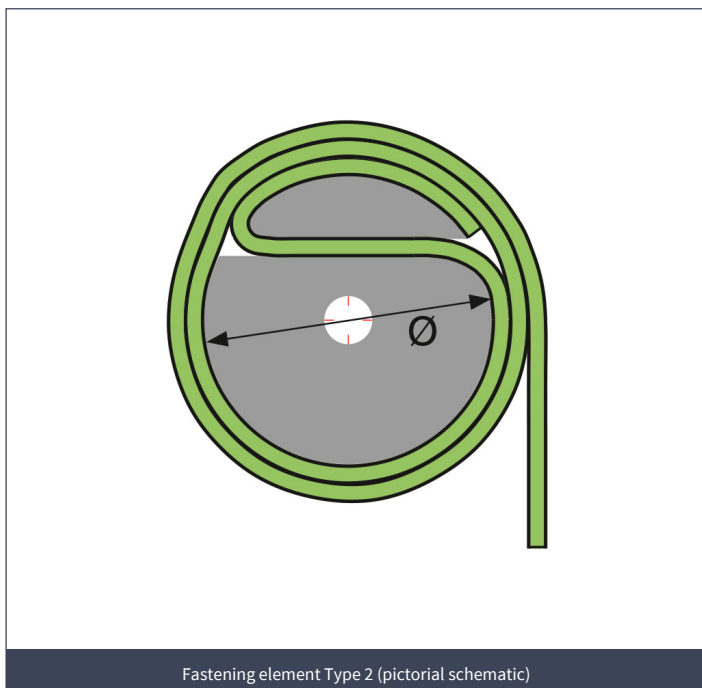

Typ 2	Technical				
	F1	F2	F2.2	F2.5	F3
\varnothing [mm] (min)	40	50	60	80	100

The type 1 and type 2 end attachments depicted in the basic diagrams are suggestions of potential solutions and do not hold any type approval certificates. At the same time, the indicated values are only guidelines and must, in individual cases, be adapted to potential special circumstances. In addition, the functional reliability of the end attachments must be checked. Potential procurement sources can be requested from us.