


Polea Trapecial ciega

NORMAS: DIN2211-ISO4183



“PT” C

FIGURAS Y DIMENSIONES

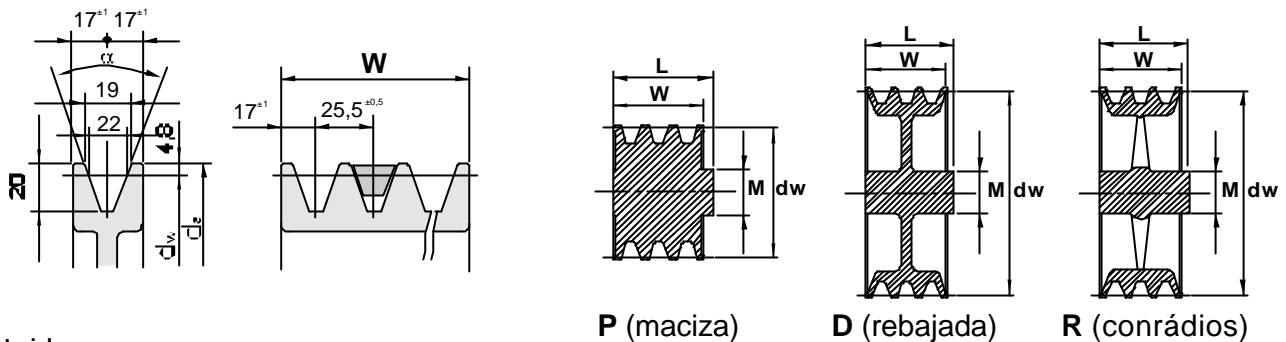

Material:
fundiciónDIN1691GG20-GG25
Tratamiento:
fosfatadasennegro

α	$dw \leq 315$	$dw > 315$	Nºcanales												
	34°	38°	W	1	2	3	4	5	6	7	8	9	10	11	12
			34	59,5	85	110,5	136	161,5	187	212,5	238	263,5	289	314,5	

Diametro primitivo	Nº canales	Figura	M (mm)	L (mm)	Diametro primitivo	Nº canales	Figura	M (mm)	L (mm)	Diametro primitivo	Nº canales	Figura	M (mm)	L (mm)
140	1	D	62	58	200	1	D	71	60	355	1	R	100	70
	2	D	70	58		2	D	73	72		2	R	105	75
	3	D	74	70		3	D	83	76		3	R	105	80
	4	D	74	74		4	D	90	88		4	R	115	90
	5	D	74	78		5	D	92	92		5	R	115	95
	6	D	75	78		6	D	96	98		6	R	115	110
150	1	D	62	59	224	1	D	71	63	400	1	R	100	70
	2	D	70	61		2	D	76	68		2	R	105	75
	3	D	70	70		3	D	83	76		3	R	105	80
	4	D	74	74		4	D	93	90		4	R	120	90
	5	D	75	78		5	D	93	92		5	R	120	95
	6	D	78	78		6	D	95	98		6	R	120	110
160	1	D	62	59	250	1	D	82	63	450	1	R	105	70
	2	D	70	61		2	D	82	71		2	R	110	75
	3	D	76	70		3	D	90	80		3	R	110	80
	4	D	78	74		4	D	95	90		4	R	120	95
	5	D	78	78		5	D	100	96		5	R	120	100
	6	D	82	78		6	D	102	102		6	R	120	110
170	1	D	70	60	280	1	D	82	64	500	1	R	110	75
	2	D	70	62		2	D	82	74		2	R	115	80
	3	D	76	74		3	D	90	80		3	R	115	85
	4	D	82	76		4	D	95	90		4	R	125	100
	5	D	82	78		5	D	100	96		5	R	125	110
	6	D	87	80		6	D	102	102		6	R	125	115
180	1	D	70	60	300	1	R	85	65	560	1	R	110	75
	2	D	70	60		2	R	90	75		2	R	115	80
	3	D	78	72		3	R	90	80		3	R	115	85
	4	D	82	74		4	R	105	90		4	R	125	100
	5	D	82	80		5	R	105	95		5	R	125	110
	6	D	87	82		6	R	105	107		6	R	125	115
190	1	D	70	60	315	1	R	85	65	630	1	R	115	75
	2	D	74	60		2	R	90	75		2	R	120	80
	3	D	78	72		3	R	90	80		3	R	120	95
	4	D	82	74		4	R	105	90		4	R	130	100
	5	D	84	80		5	R	105	95		5	R	130	110
	6	D	88	85		6	R	105	107		6	R	130	115

VéasecorreasCX/Cenpáginas???
VéasecorreasSPCX/SPC enpáginas???

DINAMICA Distribuciones, sa
BARCELONA-MADRID-BILBAO-OURENSE
Tel.:902 198131 - dinamica@dinamica.net - www.dinamica.net

